




## DEKTITE® PIPE FLASHING

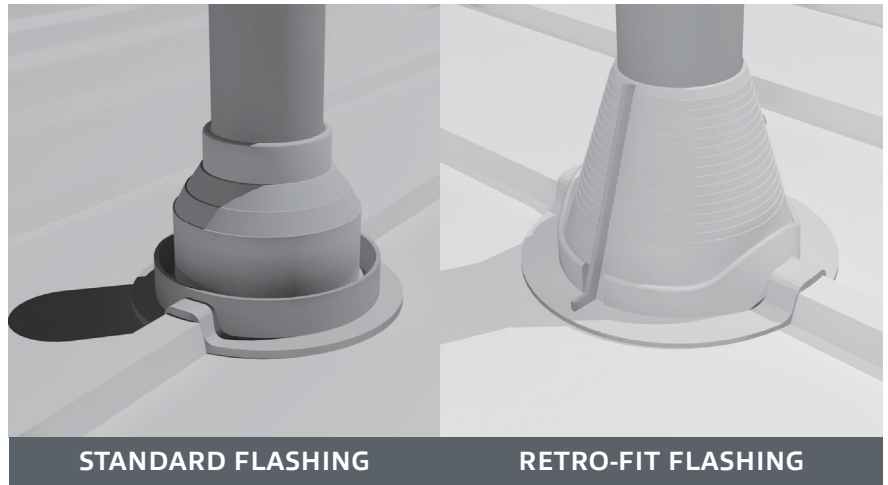

## SPECIFICATIONS

### CONSTRUCTION

- Made of a long life, flexible, weatherproof EPDM (Ethylene Propylene Diene Monomer) compound to give maximum weatherability and resistance to ozone and ultra-violet light
- 20 year life expectancy using manufacturer's recommended accessories & installation procedures

### HEAT RESISTANCE

- **Standard Flashing:** – 30° F to 250° F
- **Silicone Flashing:** – 30° F to 350° F

### DESIGN

- Pleated rubber cone conforms to most any roof pitch and panel configuration
- Allows pipe vibration by isolating movement of pipe caused by expansion and contraction of roof
- Won't crack or break
- Approved by all major Metal Building Manufacturers



### FINISH

- Gray for Standard and Retro-Fit
- Autumn Red for High Temperature Silicone

### STANDARD SIZES

- Up to (10) sizes for pipes with a range from 1/8" to 18" outside diameter
- Retro-Fit has (3) sizes for pipes with a range from 3/4" to 10" outside diameter

### INSTALLATION

- Can be attached to Steel, Aluminum, Copper, Plastic, Fiberglass or Wood
- Installs in under 10 minutes in five easy steps with no special tools required

### OPTIONS

- Retro-Fit Flashing allows flashing to be fitted around pipe instead of over top using Type 302 Stainless Steel joiner clips running down cone

# PIPE FLASHING TECHNICAL DATA

## PERFORMANCE DATA

ASTM METHOD	TEST DESCRIPTION	SPECIFICATIONS	RESULTS
<b>D412</b>	Tensile Strength (min. psi rating)	1450 psi min.	1537 psi
<b>D412</b>	Ultimate Elongation (%)	350 min.	535
<b>D1171</b>	Resistance to Ozone – min. rating	100 (no cracks)	Passed
<b>D673</b>	Heat Aging – 70 hrs. at 212° F <ul style="list-style-type: none"> <li>• Change in Hardness (points)</li> <li>• Change in Tensile Strength (%)</li> <li>• Change in Elongation (%)</li> </ul>	+/- 15 max. +/- 30 max. +/- 50 max.	8 -4.7 -26
<b>D2137</b>	Low Temperature Brittleness 3 min. @ -40° F	Non-brittle	Passed
<b>D624</b>	Tear Resistance Die C (min.) per in. of width min.	125 lbs./in. width	130 lbs.
<b>U.L. 94</b>	Flame Resistance	U.L. 94 H.B.	Passed

## SIZE & ACCESSORY SELECTION GUIDE

FLASHING SIZE	PIPE OD RANGE	FLASHING BASE OD	NO. FASTENERS	SEALANT
<b>Standard Gray - (250° F)</b>				
<b>Mini</b>	1/8" - 1"	3-5/8"	5	1/12 Tube
<b>#1</b>	1/4" - 2"	4-3/4"	6	1/10 Tube
<b>#2</b>	1-3/4" - 3"	6-1/4"	8	1/7 Tube
<b>#3</b>	1/4" - 4"	7-3/4"	10	1/6 Tube
<b>#4</b>	3" - 6"	9-1/4"	12	1/5 Tube
<b>#5</b>	4" - 7"	10-3/4"	14	1/4 Tube
<b>#6</b>	5" - 9"	12-1/2"	16	1/4 Tube
<b>#7</b>	6" - 11"	14-1/2"	18	1/3 Tube
<b>#8</b>	7" - 13"	16-1/2"	22	1/3 Tube
<b>#9</b>	10" - 18"	25-3/8"	32	1/2 Tube
<b>High Temperature - Autumn Red - (350° F)</b>				
<b>#3</b>	1/4" - 4"	7-3/4"	10	1/6 Tube
<b>#5</b>	4" - 7"	10-3/4"	14	1/4 Tube
<b>#8</b>	7" - 13"	16-1/2"	22	1/3 Tube
<b>#9</b>	10" - 18"	25-3/8"	32	1/2 Tube
<b>Retro-Fit - Gray - (250° F)</b>				
<b>#801</b>	3/4" - 2-3/4"	6-1/4"	8	1/6 Tube
<b>#802</b>	2" - 7-1/4"	10-5/8"	14	1/4 Tube
<b>#803</b>	3-1/4" - 10"	14-1/2"	18	1/3 Tube

