

DESIGN COMPONENTS, INC.


115 Walter Way - Fayetteville, GA 30214 ph: (800) 868-9910

fx: (770) 460-7872

email: sales@designcomponents.com website: www.designcomponents.com

SQUARE TO ROUND TRANSITION COVER


Square to Round Transition Cover STANDARD FEATURES	OPTIONS:	PROJECT NAME:CITY, STATE:
 1. 18 Ga. AZ55 Galvalume Steel. 2. Fully Welded Watertight Construction. 3. Welds primed after fabrication. 4. 1"Thick Neoprene Faced Insulation. 5. Cross Broken for Positive Water Run-Off. 6. Available on all Roof Curb Styles. 	1. 2. 3.	CUSTOMER:
o. A Welliable of tall Roof Carb Styles.	4.	JOB NUMBER:

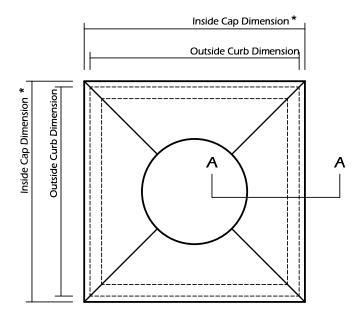


Notes:

- * (1) Inside Cap Dimension = Curb O.D. plus 1-1/2" on all "Insulated" Conventional Roof Curbs (CPC-1, 2, 3) and, 1/2" on all Metal Building Roof Curbs, and "Non-Insulated" Conventional Roof Curbs (CPC-4, 5).
- ** (2) Inside Diameter = Pipe O.D. plus 1/2".
 - (3) Available on all Roof Curb Styles.
 - (4) See Conventional or Metal Bldg. Sections for Curb Selection.
 - (5) Attach this sheet to Selected Roof Curb Drawing.

PLAN VIEW

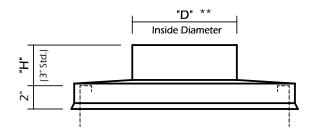

ELEVATION

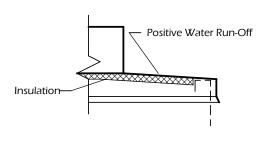

SECTION A-A

QUANTITY	INSIDE CAP DIM. *	OUTSIDE CURB DIM.	"D" (Inside Dia.) **	"H"	TAG
	x	х			
	x	х			
	х	х			
	х	х			
	х	Х			