

# **SPECIFICATIONS**

# **CONSTRUCTION**

- Roof ventilator assembly incorporates an angle frame design along with an all-welded curb cap fabricated from heavy gauge Galvanized steel
- Dampers constructed of durable fiberglass
- A finish coat of epoxy on exposed steel surfaces provides additional protection when specified

# **DESIGN**

- Upblast power roof fans are of the vertical discharge design in which air velocity seals the opening against rain and snow while the unit is in operation. When the fan is off, counterbalanced dampers close by gravity to provide weather-resistant closure
- Designed for long life and low maintenance
- All fans AMCA rated for air performance



# **FEATURES**

- Direct-drive or Belt-drive
- Blade diameters from 24" to 84"
- Motor and drive either recessed in the curb or mounted outside the airstream when specified


#### **MOTORS**

- 1/4 to 20 horsepower
- Single and 3 phase motors
- Open Drip-Proof (ODP), Totally Enclosed Fan Cooled (TEFC), Totally Enclosed Ball Bearing (TEBB) or Explosion-Proof as required

# **ACCESSORIES**


- Roof Curb (Conventional or Metal Building)
- Disconnect Switch

# **OTHER FANS AVAILABLE**

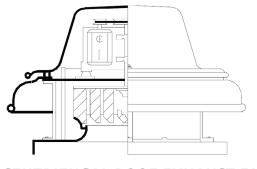


**CENTRIFUGAL ROOF EXHAUST FAN** 







**LOUVERED PENTHOUSE** 

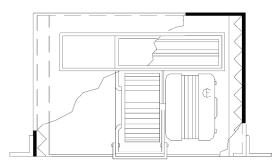


**CEILING MOUNTED CABINET FAN** 



WALL MOUNTED EXHAUST FAN

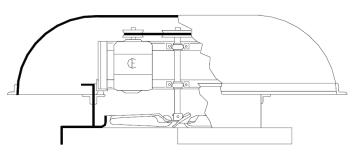


**AXIAL FLOW ROOF EXHAUST FAN** 



**IN-LINE EXHAUST FAN** 



**DAMPER** 



**VERTICAL DISCHARGE FAN** 

