

SQUARE TO ROUND TRANSITION COVER

STANDARD FEATURES

1. 18 Ga. AZ55 Galvalume Steel
2. Fully Welded Watertight Construction
3. Welds primed after fabrication
4. 1" Thick Neoprene Faced Insulation
5. Cross Broken for Positive Water Run-Off
6. Available on all Roof Curb Styles

OPTIONS

1. _____
2. _____
3. _____
4. _____
5. _____

PROJECT DETAILS

PROJECT NAME: _____




SITE ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

JOB NUMBER: _____

CUSTOMER: _____

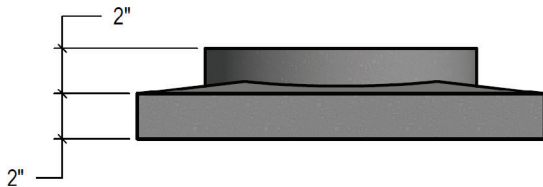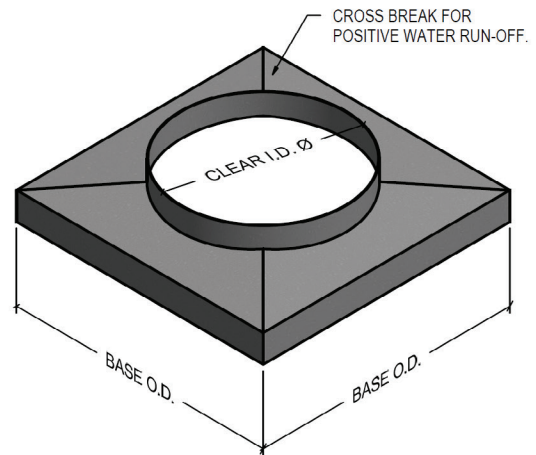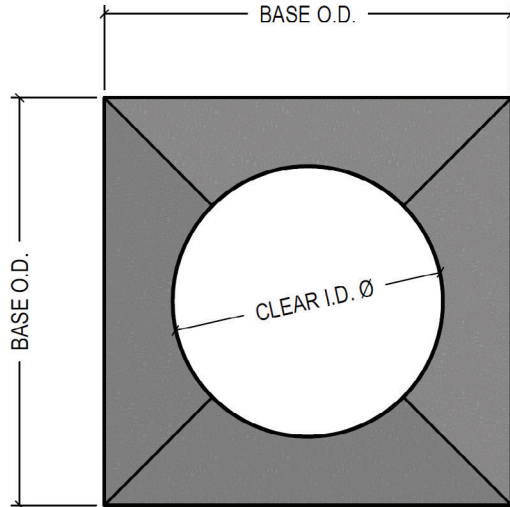

- * 1. Inside cap dimension = curb O.D. plus 1-1/2" on all "insulated" conventional roof curbs and, 1/2" on all metal building roof curbs, and "non-insulated" conventional roof curbs
- ** 2. Inside diameter = pipe O.D. plus 1/2"
- 3. Available on all roof curb styles
- 4. See conventional or metal bldg. sections for curb selection
- 5. Attach this sheet to selected roof curb drawing

QUANTITY	INSIDE CAP DIM.*	OUTSIDE CURB DIM.	"D" (Inside Dia.) **	"H"	TAG
	X	X			
	X	X			
	X	X			
	X	X			
	X	X			



SIGN FOR APPROVAL: _____ DATE: _____