

RIDGE MOUNT CURB

STANDARD FEATURES

1. 18 Ga. AZ55 Galvalume Steel
2. Corners mitered and welded watertight
3. Curb welds primed after fabrication
4. 8" minimum height
5. Internal angle reinforcing
6. 1 1/2" thick, 3# density fiberglass insulation

OPTIONS

1. _____
2. _____
3. _____
4. _____

PROJECT DETAILS


PROJECT NAME: _____

SITE ADDRESS: _____


CITY: _____

STATE: _____ ZIP: _____

JOB NUMBER: _____

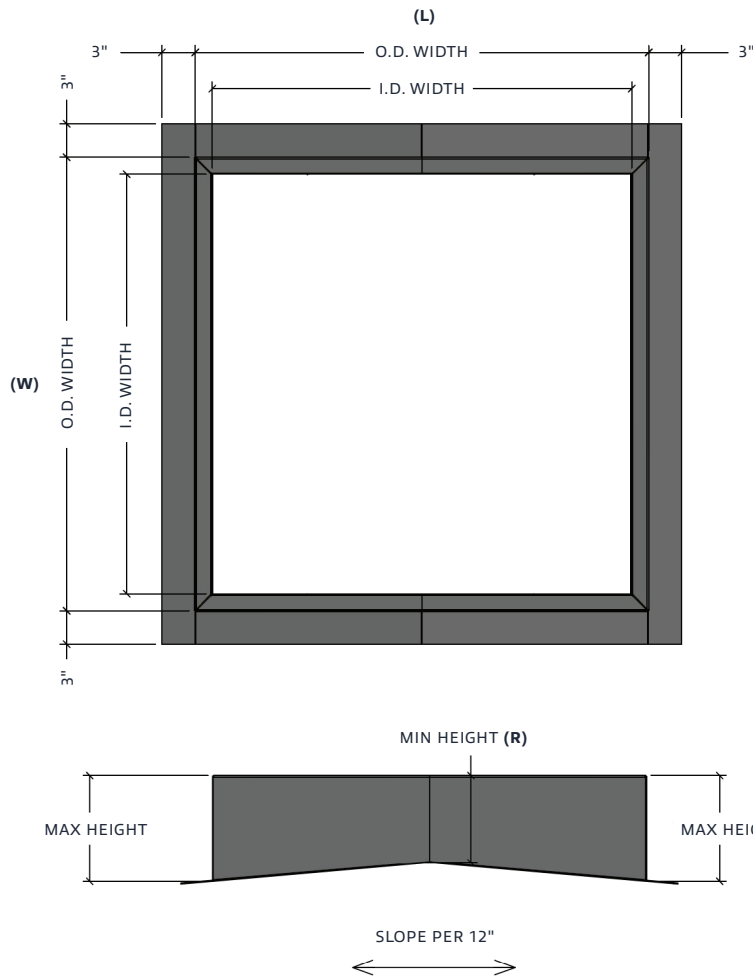


Ribs to match this roof panel: _____

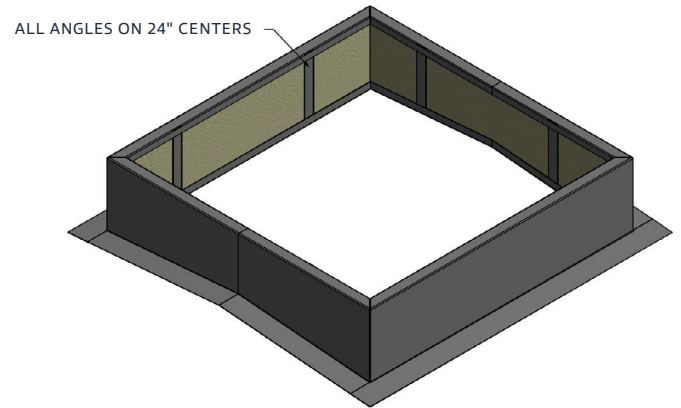


Choose:

- ☐ LOOSE RIBS?
- ☐ WELDED RIBS?



Choose style:



NOTE: The front, rear, and side flanges fit over the roof panel

QUANTITY	INSIDE DIMENSION "W" x "L"	OUTSIDE DIMENSION "W" x "L"	HEIGHT "R"	TAG
	X	X		
	X	X		
	X	X		
	X	X		
	X	X		



SIGN FOR APPROVAL: _____ DATE: _____