



ALUMINUM WINDOWS



SPECIFICATIONS

CONSTRUCTION

- Fabricated from commercial quality 6063-T5 extruded aluminum alloy
- Frame members no less than .062"
- Screws, nuts, bolts and rivets made of aluminum, stainless steel or other non-corrosive material compatible with aluminum
- Windows furnished with sash lock at meeting stile
- Sash equipped with nylon rollers to ensure proper alignment and smooth operation
- Sash equipped with wood pile Fin-Seal weatherstrip that has been treated to provide added protection
- All parts adequately sealed to prevent seepage into surrounding wall construction

FINISH

- Standard mill
- White or bronze enamel paint

SCREENS

- Where called for, insect screens are half length and made of rolled aluminum frames with 18x16 mesh fiber-glass cloth

GLASS

- **Horizontal Slide and Single Hung Windows** are factory glazed with 1/8" thick DSB or hermetically sealed 5/8" thick insulated glass
- Glass installed with rigid vinyl snap-in bead on outside of window with glazing leg rebates serrated to receive backbed compound
- **Fixed Windows** are factory glazed with 1/8" thick tempered glass or 1/2" thick hermetically sealed double glass
- Glass to be installed with outside aluminum snap-in glazing bead with vinyl seal
- Glazing leg rebates are a minimum of 3/4" in height and serrated to receive backbed compound






OPTIONS

- Installation in metal wall utilizing slide-in fins for R-Panel, A-Panel or Flat Panel (snap-on trim included)
- Installation in masonry wall or framed opening
- Clear IG, Bronze IG, and Low E Glass available

SELF-FRAMING & SELF-FLASHING STYLE WINDOW INSTALLATION

WINDOW TYPES

- HORIZONTAL SLIDE
- FIXED
- SINGLE HUNG

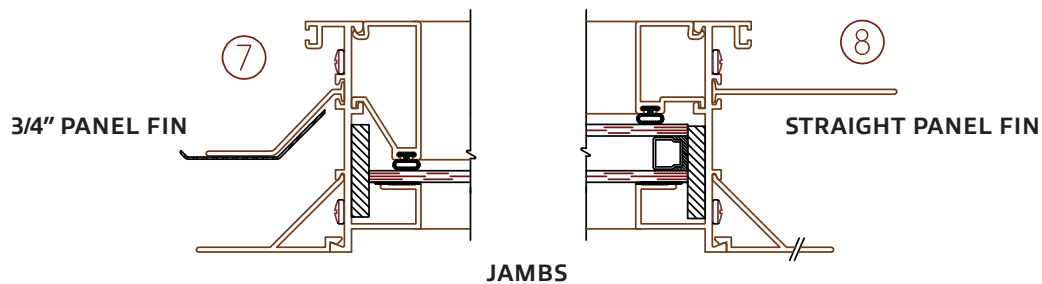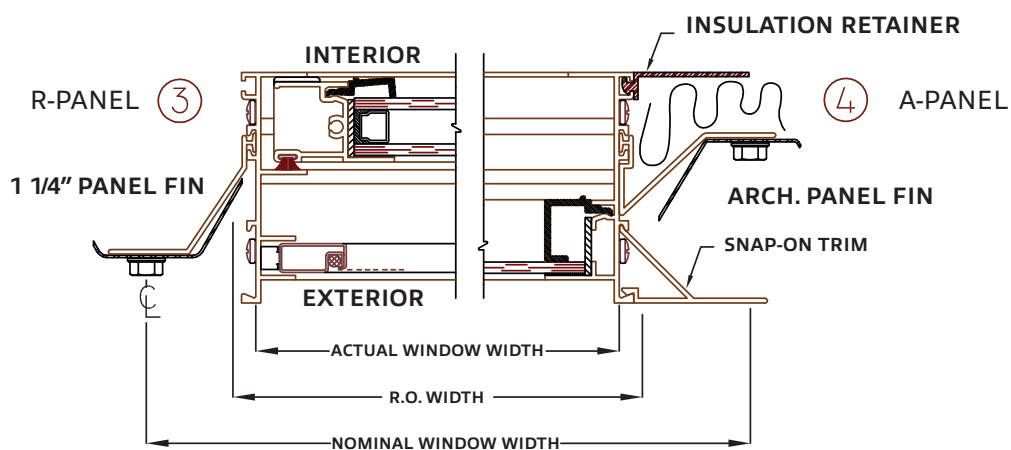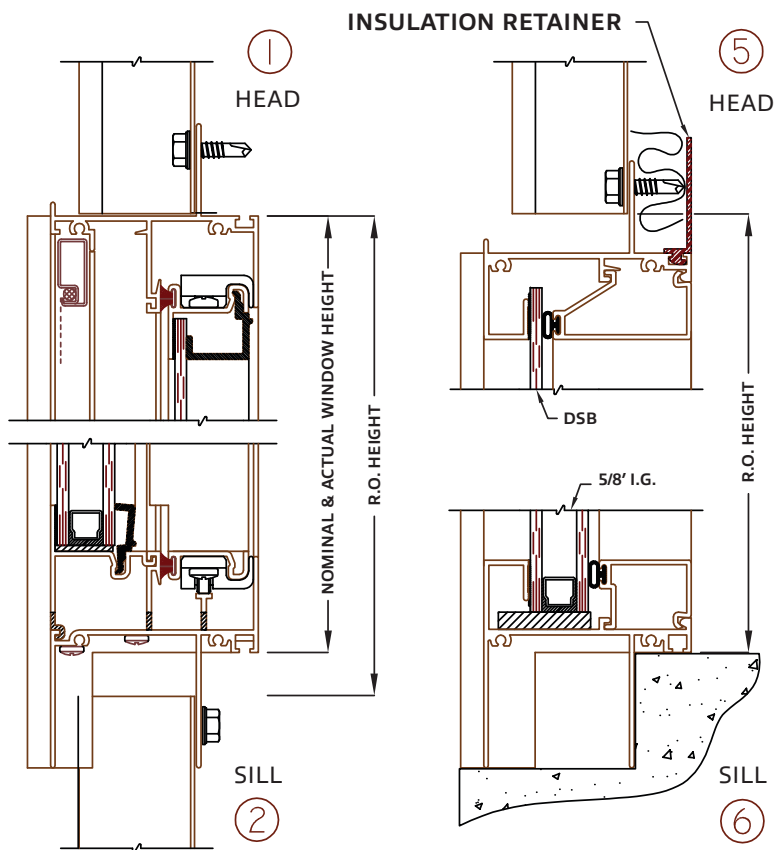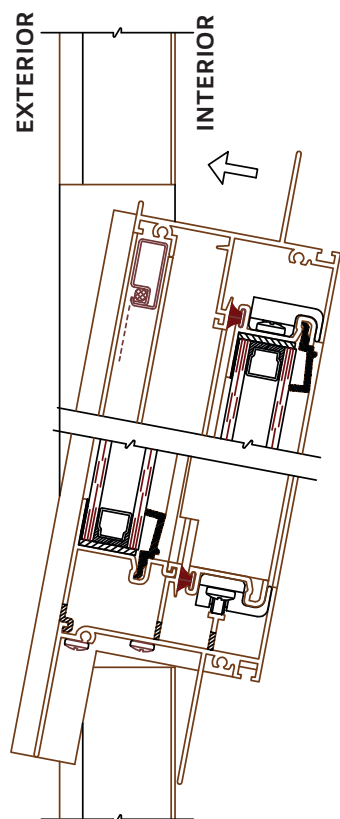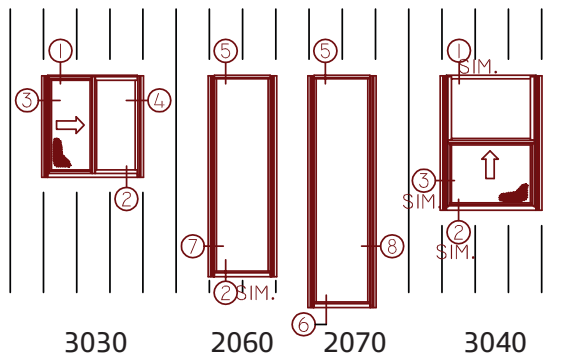

NOTE: These windows will NOT work with Framed Openings!

HALF SCALE