



DEKSTRIP® FLASHING



FLEXIBLE FLASHING SYSTEM WITH 20 YEAR WARRANTY

SPECIFICATIONS

CONSTRUCTION


- Gray Expandable Edged Flashing
- Heat welded
- Stretches 25%

HEAT RESISTANCE

- Continuous temperature range of – 58° F to + 239° F

DESIGN

- Expandable edge flashing conforms to most any profile
- Performs as an expansion joint - eliminates screw hole elongation
- Unlike Metal Flashings, lightweight, compact, easy to handle and heat weldable for watertight joints
- Can be painted to match using a good quality 100% acrylic gloss paint

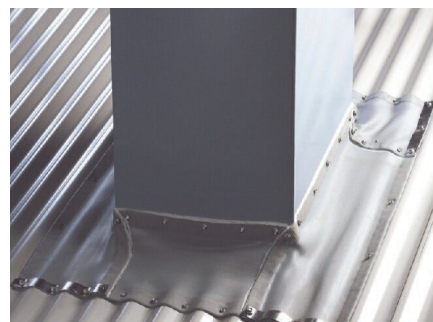

FINISH

- Gray for Standard and Retro-Fit
- Autumn Red for High Temperature Silicone

STANDARD SIZES

- 9", 12" & 18" widths cut in standard 50' and 75' rolls

ACCESSORIES

- **Recommended Sealant:** Sikaflex® -201, a one part component, Polyurethane multi-purpose caulk by Sika Corporation
- **Recommended Fasteners:** Scots® 300 Series Stainless Steel long life fastener by ITW Buildex (Tek 1 HWH 1/4-14 x 1-1/8")

APPLICATIONS

- Stepped Roofs and Gambrel Roofs
- Parapet Walls and Transition Walls
- Square and Round Roof Penetrations
- Flash between dissimilar metals
- Expansion joints
- Chimneys